
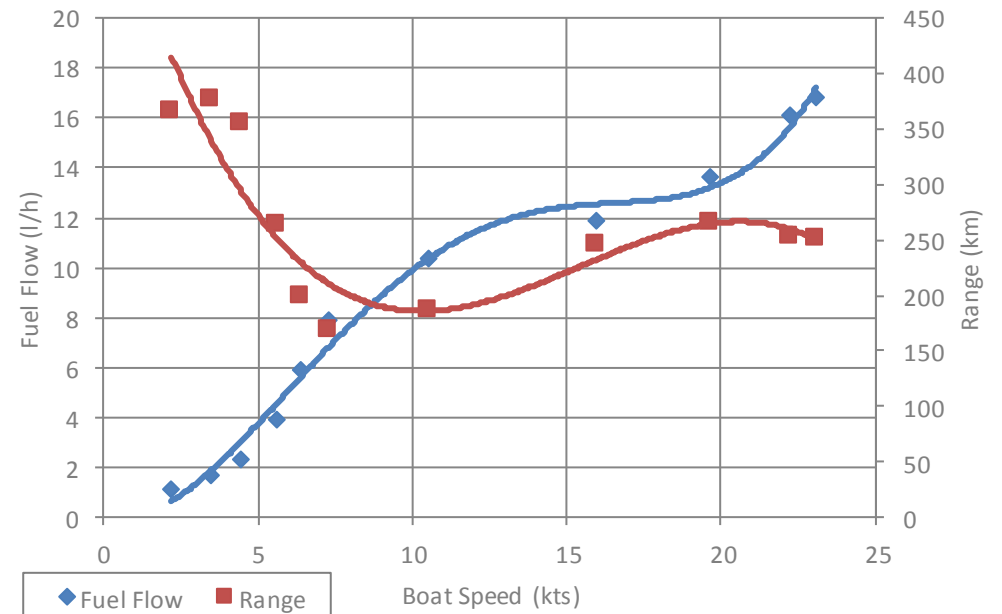


Model 555 Cabin
 Engine(s) Mercury 50 Four Stroke
 HP / kW 50 / 36.8
 Gear Ratio 1.83:1
 Propeller Black Max 10 7/8 x 11 x 3 BL AL
 Propeller PN 85632A45

Dry Weight 1045 kg
 Test Weight 1342 kg

RPM	Speed (kts)	Fuel Flow (l/h)	Range (km)
1000	2.2	1.1	367
1500	3.5	1.7	377
2000	4.5	2.3	355
2500	5.6	3.9	263
3000	6.4	5.9	199
3500	7.3	7.9	169
4000	10.6	10.4	186
4500	16.0	11.9	246
5000	19.7	13.6	265
5500	22.3	16.1	253
5690	23.1	16.8	252

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.


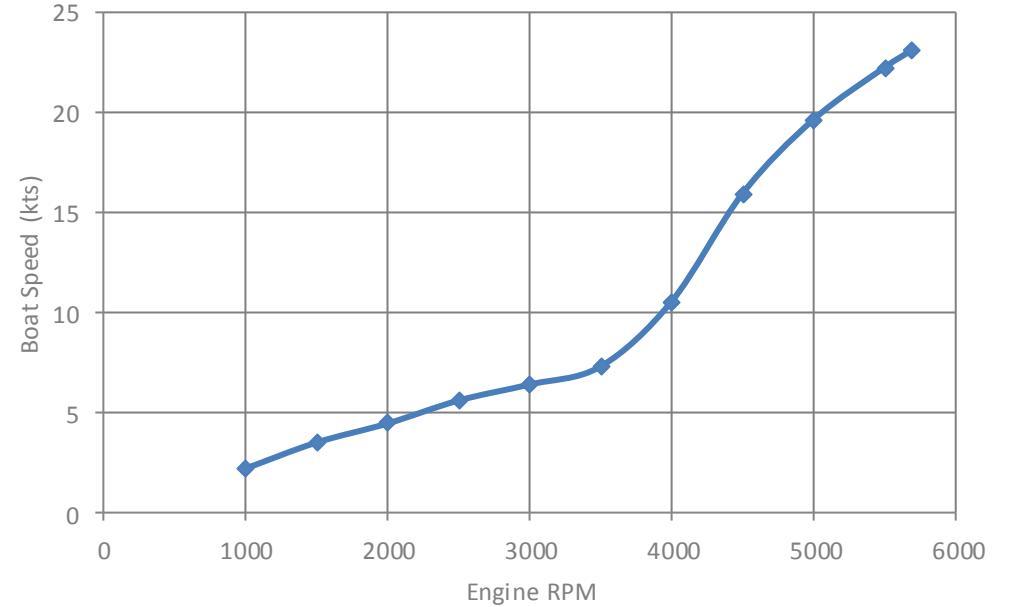


Model 555 Cabin
 Engine(s) Mercury 60 Four Stroke
 HP / kW 60 / 44.1
 Gear Ratio 1.83:1
 Propeller Black Max 10 7/8 x 11 x 3 BL AL
 Propeller PN 85632A45

Dry Weight 1045 kg
 Test Weight 1342 kg

RPM	Speed (kts)	Fuel Flow (l/h)	Range (km)
1000	2.4	1.2	367
1500	3.7	1.7	399
2000	4.9	2.3	387
2500	5.9	3.9	277
3000	6.5	6.0	199
3500	7.1	8.4	155
4000	8.7	11.2	142
4500	14.6	13.0	206
5000	18.9	13.9	249
5500	22.0	16.6	242
6125	25.7	21.3	221

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

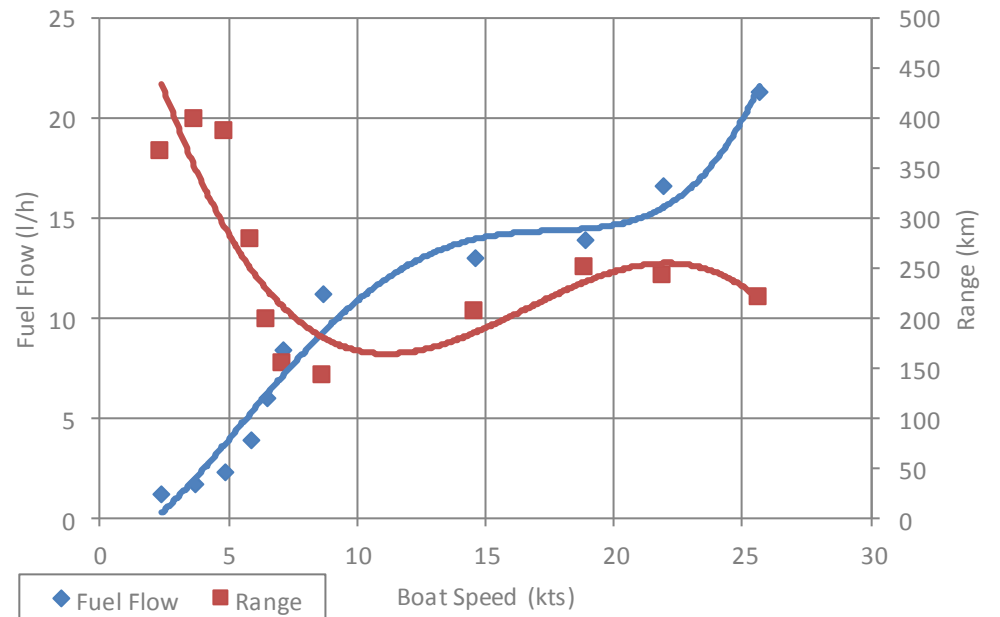
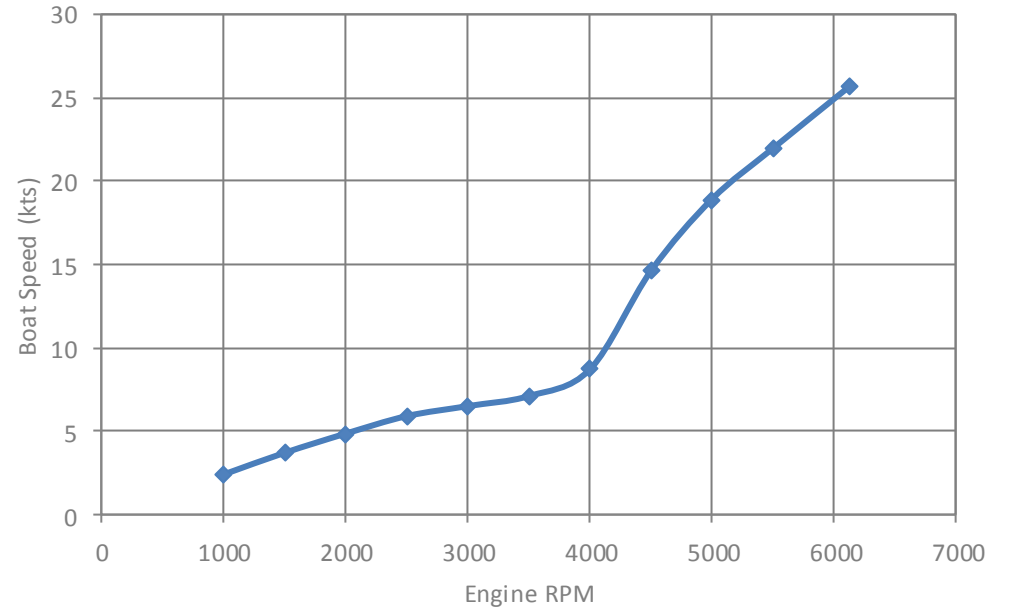


Model 555 Cabin
 Engine(s) Mercury 60 Four Stroke Command Thrust
 HP / kW 60 / 44.1
 Gear Ratio 2.33:1
 Propeller Black Max 14 x 13 x 3 BL AL
 Propeller PN 77340A45

Dry Weight 1049 kg
 Test Weight 1346 kg

RPM	Speed (kts)	Fuel Flow (l/h)	Range (km)
1000	3.1	1.2	381
1500	4.4	1.7	384
2000	5.4	2.5	324
2500	6.2	4.7	198
3000	6.9	6.8	152
3500	8.9	9.3	144
4000	13.0	11.2	174
4500	17.1	12.8	200
5000	20.2	16.6	183
5500	23.0	18.2	189
5800	24.0	18.3	197

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

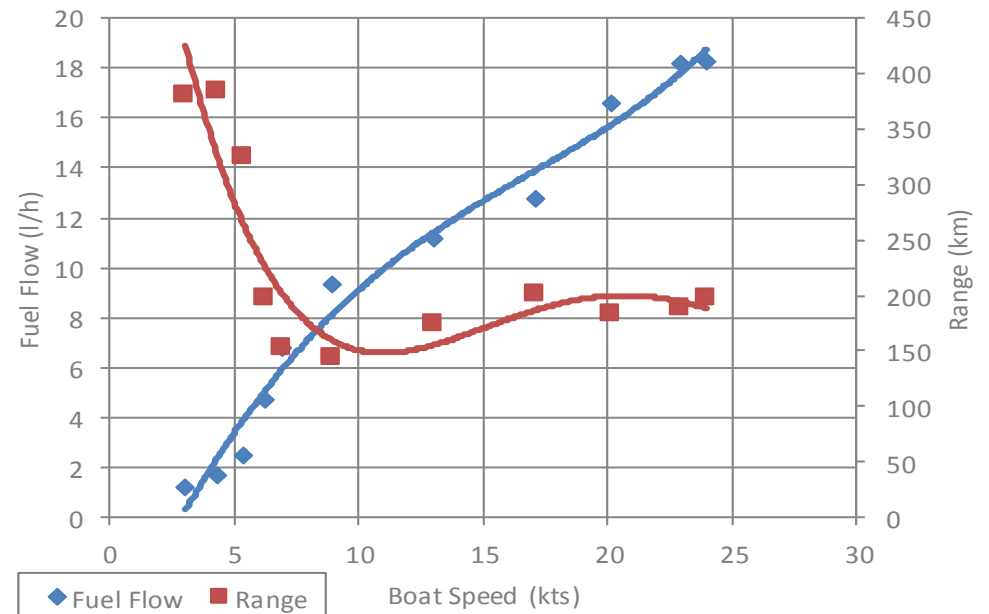
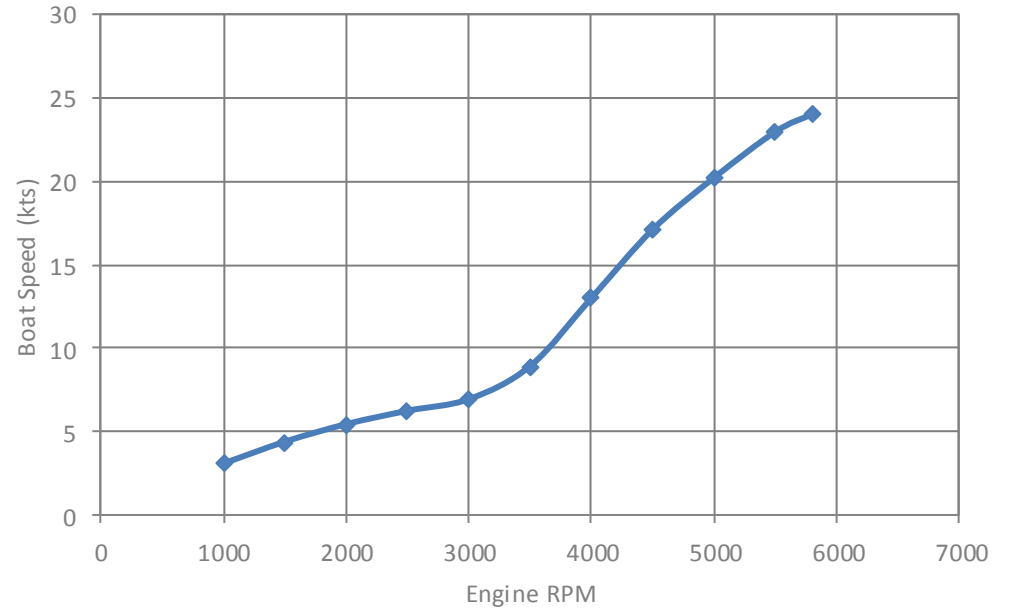


Model 555 Cabin
 Engine(s) Mercury 80 Four Stroke
 HP / kW 80 / 58.8
 Gear Ratio 2.07:1
 Propeller Spitfire 13.8 x 13 x 4 BL AL
 Propeller PN 8M8026570

Dry Weight 1097 kg
 Test Weight 1394 kg

RPM	Speed (kts)	Fuel Flow (l/h)	Range (km)
1000	3.4	2.2	279
1500	4.6	3.9	216
2000	5.8	5.0	211
2500	6.5	7.4	161
3000	7.5	10.3	133
3500	12.4	14.1	161
4000	17.6	17.3	187
4100	18.4	17.9	188
4500	21.2	20.2	192
5000	24.6	24.2	186
5530	27.5	27.3	184

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

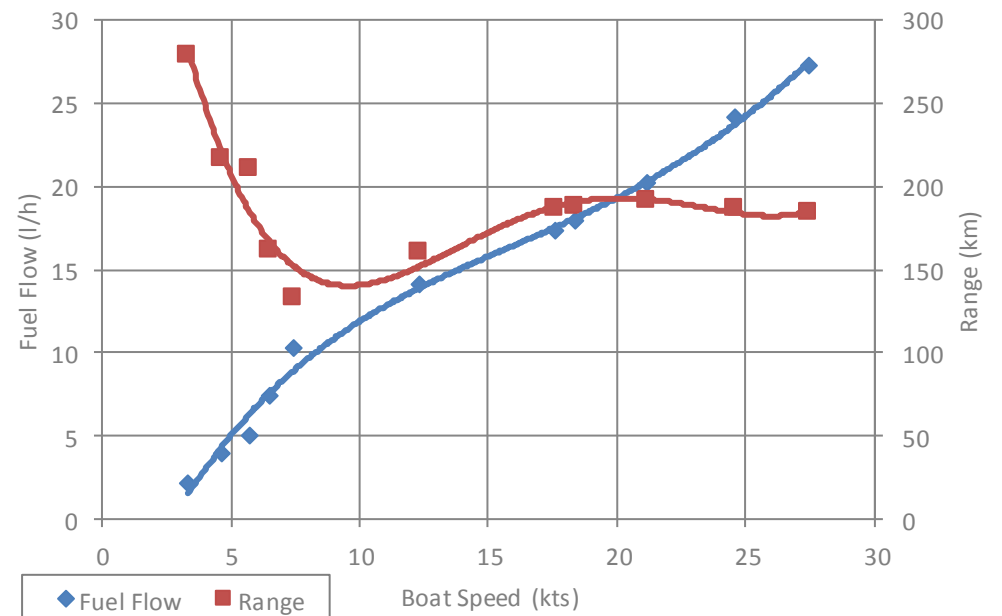
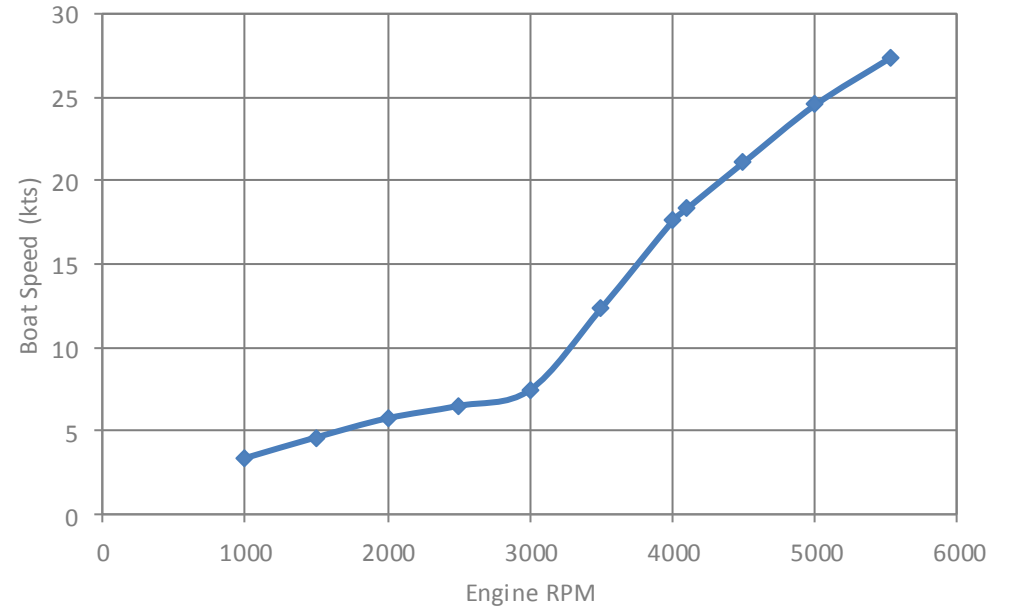


Model 555 Cabin
 Engine(s) Mercury 100 Four Stroke
 HP / kW 100 / 73.6
 Gear Ratio 2.07:1
 Propeller Spitfire 13.4 x 15 x 4 BL AL
 Propeller PN 8M8026580

Dry Weight 1097 kg
 Test Weight 1394 kg

RPM	Speed (kts)	Fuel Flow (l/h)	Range (km)
1000	3.3	2.6	229
1500	4.9	4.4	204
2000	6.1	6.1	182
2500	6.8	8.2	151
3000	8.9	11.6	140
3500	15.0	14.4	190
4000	19.7	18.8	192
4500	24.1	24.5	180
5000	28.0	26.9	191
5500	30.7	31.0	181
5700	32.0	32.8	179

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

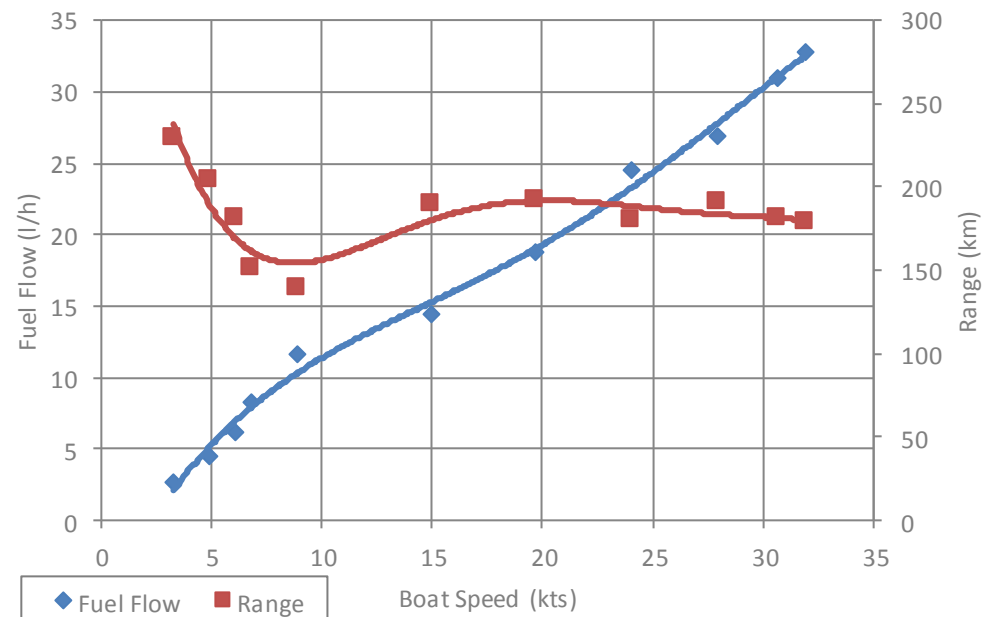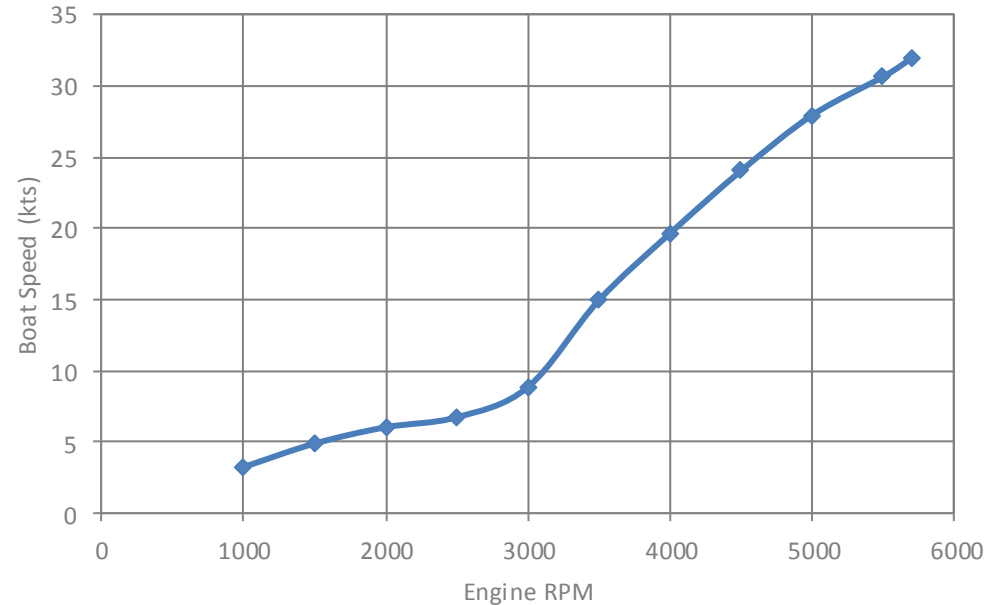

Model 555 Cabin
 Engine(s) Mercury 115 Four Stroke
 HP / kW 115 / 84.6
 Gear Ratio 2.07:1
 Propeller Spitfire 13 x 17 x 4 BL AL
 Propeller PN 8M8026590

Dry Weight 1097 kg
 Test Weight 1394 kg

RPM	Speed (kts)	Fuel Flow (l/h)	Range (km)
1000	3.4	2.7	231
1500	4.6	4.1	203
2000	6.0	6.2	177
2500	6.9	9.4	134
3000	9.7	12.7	140
3500	16.9	14.7	210
4000	22.7	22.0	189
4500	26.6	24.6	198
5000	31.1	31.0	184
5500	34.8	38.2	167
6000	37.9	43.7	159

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

